

UTILITY PATENT APPLICATION UNDER 37 CFR 1.53(b)

HONORABLE COMMISSIONER OF
PATENTS AND TRADEMARKS

Washington D.C. 20231 Case Docket No. 109085.120 US1

Sir:

Transmitted herewith for filing is the patent application of:

INVENTORS: Yin CHENG, Wilfredo PADIN, Rongli JIANG, and Andrew FEDORCHEK
FOR: WEB PAGE CONTENT TRANSLATOR

Enclosed are:

- ☒ 68 pages of specification, claims, abstract
- ☒ 11 sheets of formal drawing
- ☒ Return Receipt Postcard
- ☒ Priority Claimed from US Provisional Patent Application No. 60/---,---, filed November 6, 2000, entitled WEB PAGE CONTENT TRANSLATOR
- ☐ Information Disclosure Statement, Form PTO-1449
- ☐ Copies of IDS Citations
- ☐ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 08-0219. A duplicate copy is enclosed.
 - ☐ Any additional filing fees required under 37 CFR 1.16.
- ☒ This patent application is being submitted under 37 CFR 1.53(b) without an executed oath or declaration.
- ☐ The Commissioner is hereby authorized to charge payment of following fees during the pendency of this application or credit any overpayment to Deposit Account No. 08-0219. A duplicate copy of this sheet is enclosed.
 - ☐ Any patent application processing fees under 37 CFR 1.17.
 - ☐ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,

HALE AND DORR LLP



Gregory S. Discher
Registration No. 42,488

1455 Pennsylvania Avenue, NW
Washington, D.C. 20004
(202) 942 8400 GSD:lrr
November 8, 2000

RELATED APPLICATION

5

10

Field of the Invention

15

20

25

Before now, the solutions available for delivering web content to mobile devices generally required organizations to develop and maintain multiple sets of content, one for viewing in a desktop environment, and others for viewing on each individual type of mobile device. Further, secure connections between mobile devices and web servers via a proxy server that reformats original web page content were generally unavailable via a decorated uniform resource locator (URL) connection. A need exists, therefore, for a standards based, create once, deliver everywhere approach to web enabling mobile devices.

SUMMARY OF THE INVENTION

It is a feature and advantage of the present invention to provide a system and method that dynamically extracts a portion of web content for viewing on mobile devices;

It is another feature and advantage of the present invention to provide a system and method that reformats extracted web content for viewing on mobile devices using transforms that, for example, add meta tag information to the header of a page, add a specific attribute and attribute value to a specific tag, ignore previously specified global conversions, and/or insert text from a specified file;

It is yet another feature and advantage of the present invention to manage and maintain a single set of web content that can be used in both desktop and mobile device environments;

It is still another feature and advantage of the present invention to eliminate the need to maintain multiple sets of web content, one for each device type, for delivery to a plurality of mobile devices.

It is another feature and advantage of the present invention to optionally provide a secure connection via a decorated URL between a mobile device and/or a client (e.g., a Wireless Access Protocol (WAP) gateway)

which forwards a secure request from the mobile device, a proxy server that reformats original web page content, and a web page server.

It is another feature and advantage of the present invention to provide a secure connection between, for example, a proxy server that reformats an original web page and an origin web page server by setting up the proxy server in a mobile device browser (i.e., enabling the mobile device to communicate with the origin web page server via the proxy server).

To achieve these features and advantages, the present invention provides a system, method, and medium that extracts a portion of web page content and reformats the extracted content for delivery to one or more wireless devices. Embodiments of the present invention contemplate that web-based content can be created one time, whereafter at least a portion thereof is extracted, reformatted, and transmitted to, for example, one or more handheld device browsers (e.g., the Palm Web Clipping Browser from Palm, Inc., Santa Clara, CA, Pocket Internet Explorer from Microsoft Corp, Redmond, WA, and Wireless Access Protocol (WAP) on smart phones, etc.). This create-once, deliver-everywhere approach eliminates the need to build and maintain separate web pages for different devices and browsers, as well as the need to install proprietary browser software on the handheld device(s). In one embodiment contemplated by the present invention, a user generates a request, from a mobile device to a proxy server. The proxy server then forwards the user request to an origin web server (having a first file format), whereafter the requested web page is returned to the proxy server. The appropriate components (e.g., tags, etc.) of, for example, the HTML or Wireless Markup Language (WML) source code, are extracted from the web page. The extracted web page contents are then reformatted to place the extracted web page contents in a format the is viewable by one or more mobile devices. The reformatted web page is then transmitted from the proxy server to the requesting mobile device. The may be done for at least one of groups of

090770-10300

devices, individual devices, web site-specific conversions, or for all web sites. The method of the present invention also provides a secure connection via a decorated URL between a mobile device and/or client (e.g., a WAP gateway) which forwards a secure request from the mobile device, a proxy server that

5 reformats original web page content, and a web page server.

Before explaining at least one embodiment of the invention in detail, it is to be understood that the invention is not limited in its application to the details of construction and to the arrangements of the components set forth in the following description or illustrated in the drawings. The invention is

10 capable of other embodiments and of being practiced and carried out in various ways. As such, those skilled in the art will appreciate that the conception, upon which this disclosure is based, may readily be utilized as a basis for the designing of other structures, methods and systems for carrying out the several purposes of the present invention. It is important, therefore,

15 that the claims be regarded as including such equivalent constructions insofar as they do not depart from the spirit and scope of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

20 The Detailed Description will be best understood when read in reference to the accompanying figures wherein:

FIG. 1 is a representative simplified block diagram of a mobile device, a proxy server, and a content server which also illustrates an overview of the method according to the present invention;

25 FIG. 2 is a schematically simplified flow diagram of the conversion workflow for HTML mobile devices;

FIG. 3 is a flow diagram illustrating a process of creating a device profile;

FIG. 4 is a representative screen display wherein a device profile can

30 be created;

FIG. 5 is a site-mining workflow diagram;

FIG. 6 is a diagram of the Document Object Model (DOM);

FIG. 7 is a flow diagram illustrating a process of creating conversions for a group of mobile devices;

5 FIG. 8 is an exemplary screen display wherein conversions are defined for a group of mobile devices;

FIG. 9 is a flow diagram illustrating a process of creating conversions for particular mobile devices;

10 FIG. 10 is a flow diagram illustrating a process of creating conversions for all web sites;

FIG. 11 illustrates one example of a central processing unit for implementing a computer process in accordance with a computer implemented stand-alone embodiment of the present invention; and

15 FIG. 12 illustrates one example of a block diagram of internal hardware of the central processing unit of FIG. 11.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT OF THE INVENTION

20 FIG. 1 illustrates an architecture 100 as contemplated of the present invention (and environments thereof). Referring now to FIG. 1, it is envisioned that a proxy server 110 reformats/converts web content 104 on an origin web server 102 into a format 122 readable on any mobile device 108 (which can be any number of different mobile device types). Details of the
25 architecture of the present invention, the order in which conversions are processed, and how mobile devices 108 are connected to proxy server 110 through the present invention are explained herein.

30 The proxy server 110 of the present invention “sits” between the clients (e.g., the mobile device(s) 108) and the origin web server(s) 102 that provide Web content 104. If necessary, a gateway 109 may optionally be

provided that interfaces between, for example, the mobile device 108 and the proxy server 110. In this context, an origin web server 102 is a web server that contains the original web page 104. It is different from, for example, the proxy server 110 because the original web server 102 is maintained and updated by the individual(s) and/or organization(s) that hosts the web site for the web page 104. Unlike other proxy servers, however, the present invention obtains the code (e.g., HTML) of the user requested web page 104, and modifies it at the proxy server 110 (once obtained) in accordance with at least one novel method described herein . Embodiments contemplated by the present invention also envision reformatting and/or converting an entire web site or request specific Web content that is needed from the origin web server 102.

In general, embodiments of the present invention contemplate that architecture 100 comprises one or more servers 102 having web content (in the form of at least one web page 104), a proxy server 110, at least one mobile device 108, and at least one network 114. For simplicity, only one of each of the mobile device 108, server 102, and network 114 are shown in FIG. 1, although in general the system 100 may comprise multiples of each. It is envisioned that each instance of web content 104 each have associated therewith a URL.

Upon a request 106 from a mobile device 108 for a given web page 104, typically made through a HyperText Transport Protocol (HTTP) from the resident mobile device, or HyperText Transport Protocol Secure (HTTPS) request from the resident mobile device 108 browser, the process for providing a reformatted/converted and extracted web page 104 begins. It should be understood that the gateway 109 will receive such a HTTP or HTTPS request if a gateway 109 is used. Upon determining that the requested page 104 resides at the server 102, the proxy server 110 makes a request 112 for the page. As shown, the proxy server 110 and the server 102 are connected via a network 114 such as the Internet. It should be understood that the present invention can be used with networks other than the Internet where visual

content is involved. Therefore, depending on the network(s) being utilized in conjunction with the present invention, it should be apparent that the visual content from such network(s) may be other than “web” content. The server 102 responsively returns 116, via the network 114, the requested web page 104 to the proxy server 110. The web page 104 is typically an HTML file with references to any component .wav, .mov, and/or Joint Photographic Experts Group (JPEG) files, which together comprise the web page 104. It should also be understood that other file formats (e.g., .gif (graphics interchange format)) and web page components (e.g., Java applets) can also be accessed and returned to the proxy server 110.

The conversion engine 118, preferably residing within the proxy server 110, retrieves and/or accesses the stored web page 104, and accesses a predefined extraction and conversion file associated with the mobile device 108 and/or web page 104, preferably via the extraction and conversion file database 120. Extraction and conversion files may, for example, contain the following information:

- Variables: These are variables that are defined when a site-mining expression is created. A variable is essentially a place holder for the information to “go” after the conversion engine 118 extracts it from a web page 104 preferably residing on server 102. A site-mining expression is a command that tells the conversion engine 118 where to locate the desired web content (in, for example, the HTML code) in the web page 104. One embodiment of the present invention uses software such as Spyglass Prism from OpenTV, Inc., Mountain View, CA to extract data from a designated web page 104. Methods that can be used in site-mining expressions in accordance with the Spyglass Prism product are contained in, for example, the *Exemplary Site Mining Methods* section and other sections contained herein.

- System variables: Embodiments of the present invention contemplate that there are preferably at least three system variables that can be added to extraction and conversion files, including:

a) &&Host;

Identifies the name of the server 102 that the proxy server 110 is connecting to for a particular request 106.

b) &&User-Agent (UA);

5 Identifies the type of mobile device 108 and the web browser of the mobile device 108.

c) &&URLLink;

Identifies the address of the server 102 that the proxy server 110 is connecting to.

10 It should be understood that the variables and delimiters are illustrative only and that different variables and/or delimiters can be used to achieve the same functionality

• Transforms: Transforms are conversion tags that are used to re-format the content extracted from a web page 104. These special tags (also called sw-transforms) provide the power to display the Web content in the desired format 122 for a mobile device(s) 108. The present invention provides transforms that, for example: add meta tag information to the header of a page, add a specific attribute and attribute value to a specific tag, ignore previously specified global conversions, insert text from a specified file, remove a specific attribute from all tags, remove a specific attribute from a specific tag, remove the comments tag from a web site or specific web content, remove a specific tag from a web site or web content, remove a specific tag and all the information that appears within the tag from a web site or web content, replace one tag with another, set a specific value of a specific attribute of a specific tag, stop processing of all subsequent reformatting commands, substitute one sequence of text for another sequence of text, and remove table formatting.

15

20

25

The sw-transforms used to reformat the extracted web content are contained in the *SW-Transforms* section contained herein.

30 Mobile devices 108 generally come in a variety of different sizes and

have a variety of different screen interfaces. As will be discussed in further detail herein, the present invention provides the ability to uniquely tailor web page 104 content for specific mobile devices 108. A particular organization may know that its users will always be retrieving web pages using, for example, Palm operating system devices (e.g., Palm III, X, VILs, etc.). Formatting rules may be set up that apply to the group of Palm operating system devices generally, as well as, for example, the Palm VII in particular. To create a device profile, both the specific version of a mobile device 108 and its web browser (e.g., a Palm V with browser A, etc.) are needed. In one embodiment, device profiles are registered with the proxy server 110 by using HTTP request headers, as will be explained in detail herein.

It should also be understood that in addition to providing a device profile for an individual mobile device 108, device profiles can also be created for a group of mobile devices 108, as well as all mobile devices 108. In the latter case, suppose, for example, an organization's mobile device 108 users will often be visiting graphic-intensive web sites, and that the users will be viewing these sites on, say, smart phones (i.e., a cellular telephone that provides voice, limited Internet access, e-mail, pager and/or facsimile service, and typically has a small screen and little memory). A global extraction and conversion file can be created that, for example, instructs the conversion engine 118 to replace all graphics with text links. This conversion would affect all web content that is delivered to all mobile device 108 users. Users can therefore access web sites they need without the inconvenience of waiting online for graphics to download onto their mobile devices 108.

Thus, using an extraction and conversion file within the storage 120 corresponding to the particular mobile device(s) 108, the conversion engine 118 uses the expressions defined therein, and performs the designated operations upon, for example, the HTML code contained in the web page 104. The designated HTML content of the retrieved web page 104 is extracted, subsequently and/or converted, and transmitted as a reformatted web page 122

to the mobile device 108.

To improve performance (e.g., speed), web page 104 can optionally be cached in a local cache 124 on the proxy server 110. Caching enables web pages 104 to be processed faster, thereby reducing the time mobile device 108 users spend online. When the proxy server 110 receives a web page 104 over, say, the Internet 114, the conversion engine 118 can convert and store the web page 122 in a web page 122 specific cache. When a user of a mobile device 108 wants to access the web page 122, the conversion engine 118 retrieves it from the cache 124, which reduces online time.

It should also be understood that the proxy server 110 can also cache unconverted web page 104 content. Unconverted web page 104 content is content received from the server 102, which has not yet been converted and/or extracted by the conversion engine 118. Cache settings can therefore be configured to meet specific needs (e.g., when caching will begin, the length of time pages will be kept in cache, and the amount of disk space and memory that will be allocated to caching).

Security Features

The proxy server 110 according to the present invention envisions the use of various types of security to ensure that the transmission of information is secure (e.g., that unauthorized parties cannot intercept and/or access the information). An example envisioned by embodiments of the present invention provides the ability to support the secure socket layer (SSL) protocol developed by Netscape Corp. (now merged with America Online, Inc., Dulles, VA). When this feature is utilized, users can make secure connections (from, for example, a mobile device 108 to the proxy server 108 and from the proxy server 108 to the origin web server 102 and back), as well as partially secure connections. In embodiments contemplated by the present invention, the proxy server will the proxy server will load an SSL library, which includes, for example, SSL 2.0 and SSL 3.X protocol specification modules.

If the SSL feature of the present invention is utilized, a digital certificate from a certificate authority (e.g., VeriSign) must be obtained. The digital certificate is sent to a client (e.g., a mobile device 108 or a gateway 109) to authenticate the proxy server 110, in order to establish a secure connection between the client and the proxy server 110).

Embodiments of the present invention contemplate that there are at least four types of SSL settings that can be configured for the proxy server 110, including, for example:

- SSLON: This setting determines whether SSL is turned on and off. The default setting is on (as indicated by, for example, SSLON=1).
- SSL port: This setting determines which secure port the server listens on.
- SSL Certificate Settings: SSL certificate request settings are located in the proxy server .ini file. Changes to the default public certificate file name or the password for the certificate key (e.g., password), are made via the proxy server 110 .ini file.
- SSLOutboundPort: This port is a listening port the proxy server 110 uses for outbound SSL requests.

It is envisioned that if the defaults are accepted for each of the above four SSL settings, the SSL settings in, for example, the proxy server 110 .ini file do not have to be configured.

Embodiments of the present invention contemplate that in the event that a particular mobile device 108 does not enable a proxy server 110 to be used, the present invention enables mobile devices to be redirected to proxy through the proxy server 110 by typing (or in some way, entering or implementing) the proxy server 110 address (location) and the URL of the desired web site 104 in, for example, an address field of the mobile device 108 browser. This type of address is commonly referred to as a “decorated URL”. A decorated URL contains, for example, the proxy server 110 host name and

port number, and the web address of the web site 104 that is to be accessed.

With the present invention, the above-identified URL decoration can be used to make an un-secure (http://) request or a secure (https://) request. Regardless of what type of connection is made, after an initial decorated URL is typed in, the proxy server retrieves the desired web page 104. For example, the proxy server automatically re-writes all of the other links within the site that are initially proxied to via the decorated URL. That is, if one or more links are embedded within a first web site, and a user clicks on one of the links, the link that the user clicks on will also be “rewritten” in decorated form in accordance with the invention. Also, if a connection is made to an un-secure site, and a user subsequently clicks a secure link within that web site, the proxy server 110 automatically re-decorates the URL, to provide the secure connection. Therefore, a user only has to type the decorated URL once each time a new Web site is accessed.

As indicated above, embodiments of the present invention contemplate that a decorated URL contains the proxy server 110 host name and port number, and the web address of the site that is to be accessed. For example, a decorated URL for the Aether Software Web (www.aethersystems.com) site may look like:

http://yourscoutweb_domain_name:port_number/?url=
http://www.aethersystems.com.

Secure requests made either to and/or from the proxy server 110 can be done by using a decorated URL. If a decorated URL is being used, there are three options. First, a completely secure connection can be made from the mobile device 108, and optionally forwarded by the gateway 109 (if one is used), to proxy server 110, and from the proxy server 110 to the origin web server 102 (i.e., the user makes a secure request to the proxy server 110 and a secure request to the web page 104. The origin server 102 then encrypts the

user request and the web page 104 that is returned to the mobile device.). This type of connection provides end-to-end security and is useful, for example, for e-commerce sites or for secure Web-based applications. This type of decorated URL may look as follows:

5

`https://yourscoutweb_domain_name:port_number/?url=
https://www.aethersystems.com.`

Second, a secure connection can be made between the mobile device 108, including the gateway 109 (if one is used), and the proxy server 110. A business or content provider, for example, that uses the proxy server at the bridge of a firewall may want users to make a secure connection to the proxy server 110. This is a partially secure connection. This embodiment contemplates a secure connection between, for example, at least a gateway to which the mobile device 108 interfaces, and the proxy server 110. This type of decorated URL may look, for example, as follows:

`https://yourscoutweb_domain_name:port_number/?url=
http://www.aethersystems.com.`

20

Finally, a secure connection can be made between the proxy server 110 and the origin web server 102. For example, a wireless ISP may want to have users make a regular un-secure request in order to access the proxy server 110, and then make a secure connection between the proxy server 110 and the origin server 102. In this case, the decorated URL may look, for example, as follows:

`http://yourscoutweb_domain_name:port_number/?url=
https://www.aethersystems.com.`

30

0030770-110800

It will be understood that, depending on the mobile device, the menus that a user will need to access on the mobile device to set up the decorated URL will vary. For example, on a PALM V device, the HandWeb icon in the applications launcher can be tapped to display the last page accessed. Then, the menu button can be tapped to display the Options menu, in which the Open Location menu item may be tapped. The decorated URL may then be typed in the URL field, and the web site corresponding to the URL is then accessed.

FIG. 2 is a simplified flow diagram of a conversion workflow for HTML-based mobile devices, as contemplated by the present invention. In step 201, a device profile is created for each type mobile device 108 in accordance with the HTTP. It is envisioned that each mobile device 108 is registered with the proxy server 110 to indicate which conversions for the device 108 are desired. Then, when conversion engine 110 receives a request 106, it compares the headers in the request 106 with the headers in an extraction and conversion file associated with the requesting mobile device 108 to determine which conversions to perform.

One method of performing step 201 as contemplated by embodiments of the present invention is shown in FIG. 3. In step 302, user-agent (UA) information (i.e., mobile device 108 information) is provided to the proxy server 110 that uniquely identifies a type of mobile device 108 (e.g., by make and/or model) and the Web browser used on that device. The user-agent information is stored in either the device profile information on the proxy server 110 or, for example, in a global file that stores such information for all devices 108.

In step 304, in accordance with the HTTP (and HTTPS) specification, UA-color information is provided via a header that specifies, for example, the screen color of the mobile device 108. In various embodiments if a mobile device 108 sends this header, the conversion engine 110 performs color reduction automatically taking into consideration, for example, the screen

color of the mobile device 108. If the mobile device does not send the UA-color header, a color reduction conversion for the mobile device 108 can be configured. If the mobile device 108 does send a UA-color header, the value sent in the header can optionally be overridden to improve device performance by, for example, reducing colors to a level lower than the device's maximum capability.

The UA-connection type (e.g., HTTP or HTTPS) between the mobile device 108 and the proxy server 110, and/or the proxy server 110 and the origin web server 102 is specified in step 306. The UA-connection is used to specify the type of connection that the mobile device 108 connects to. In step 308, the UA-CPU is specified. This information is used to specify the CPU (e.g., the manufacturer, model, and/or clock speed) of the mobile device 108. In step 310, the UA display field is used to specify the display type of the user agent. In step 312, the UA-HTML field is used to specify the version of HTML of the mobile device 108. In step 314, The UA-input field 414 is used to specify the types of input fields (e.g., password field, text box, image, file, etc.) of the mobile device 108 screen display. In step 316, the UA-language field is used to specify the language of the mobile device 108 (e.g., English, Spanish, etc.). In step 316, other fields, such as UA-operating system can be used to specify, e.g., the operating system of the mobile device 108, as well as other items of information. It will be recognized that not all of the above-identified steps will be applicable to every type of mobile device 108.

FIG. 4 shows a representative screen display that may be used to enter the data of FIG. 3. The UA field 402, UA-color field 404 field, UA-connection field 406, UA-CPU field 408, UA-display field 410, UA-HTML field 412, UA-input field 414, and UA-language field 416 are shown. As indicated in step 316, other input fields, such as, for example, the UA operating system, may also be provided.

Mobile device 108 profiles, as previously noted, can comprise a series of device headers based on fields 402, 402, 406, 408, 410, 414, 416 (e.g.,

HTTP request headers). When a user requests a web page 104 using a mobile device 108, the mobile device 108 sends associated HTTP request headers, which uniquely identify the mobile device 108 to the proxy server 110. A mobile device 108 is generally defined by both the hardware and browser. The device headers thus serve to identify the mobile device 108 to the proxy server 110.

In step 202, site-mining is performed, where web page content is extracted from a web page 104. The site-mining 202 process as contemplated by embodiments of the present invention is shown in FIG. 5. In step 502, the desired web page 104 is retrieved by the proxy server 110. The retrieved document is envisioned to be a HTML-based or similar document (e.g., a WML document). In step 504, a Document Object Model (DOM) (shown at 600 in FIG. 6) corresponding to the retrieved web page 104 is created. The DOM 600, as proposed by the World Wide Web Consortium (W3C), is a standard internal representation of the document structure and attempts to make it easier for programmers to access components and delete, add or edit their content, attributes and style. In essence, the DOM 600 makes it possible for programmers to write applications which work properly on all browsers and servers, and on all platforms. While programmers may need to use different programming languages, they do not need to change their programming model. The W3C's DOM 600 thus offers programmers a platform- and language-neutral program interface which will enable programming across platforms with languages such as, for example, Java and ECMAScript.

Referring to FIG. 6, the DOM 600 shown therein is an exemplary representation of an HTML document in which all elements are treated as objects. The DOM is a platform-neutral and language neutral interface allowing dynamic access and updating of content, structure, and style of documents. A single DOM object can represent an element (e.g., the text in an element or an attribute value), the entire document (e.g., web page 104) or a

collection of objects. The DOM 600 object hierarchy is a series of nested objects, where each object contains either data or additional objects. The topmost object is the HTML document 602 (e.g., web page 104) itself. For further reference, see the W3C's DOM Level 1 Specification, dated October 1, 1998, which is incorporated herein by reference.

In step 506, objects are extracted from the web page 104 in accordance with the DOM 600. For example, the name of the tag the content resides in must be determined (e.g., table), as well as the tag number (e.g., is it the first table? Second?). Also, whether the content is in a sub-tag or child of a parent tag should be determined. If so, what number is it? (e.g., if it is a table row that is desired, then what number is it?)

In step 508, the site-mining expressions, contained in an extraction and conversion file 512, are performed on the extracted object(s) of step 506. Embodiments of the present invention contemplate that one or more methods having the functionality of the methods provided in, for example, the *Exemplary Site Mining Methods* section will be used to extract the desired content. In accordance with the present invention, one or more of the conversion methods shown in the *Site-Mining Expressions Examples* section is used to convert/reformat one or more of the extracted objects to facilitate display on one or more mobile devices 108. Then, in step 510, after applying the operations contained in the extraction and conversion file 512 to the web page 104, the transformed web page 122 is provided and transmitted to one or more mobile devices 108. (However, prior to the transmission to one or more mobile devices, other types of conversions can also be performed, as indicated in Figure 2).

The following three examples of site-mining expressions are provided. The expressions utilize methods defined in, for example, the *Exemplary Site-Mining Methods* section. As shown by the following examples, a site-mining expression specifies a path to an object (HTML element) from the DOM (e.g., web page 104) using methods defined in the site-mining expression language

as shown in the *Exemplary Site-Mining Methods* section. Each of the methods contained in the *Exemplary Site-Mining Methods* section performs an action on a collection of objects in the object hierarchy. Each method returns a list of one or more objects. It should be understood the following examples are illustrative only, and that the potential number of HTML source code and expression combinations are virtually infinite.

Site-Mining Expression Examples

10 Original HTML code
<HTML>
<HEAD> <TITLE> Title of the Page </TITLE> </HEAD>
<BODY>
15 <TABLE WIDTH="600" ID="ScoutWeb">
<TR><TD> table 1, row 1 </TD></TR>
<TR><TD> table 1, row 2 </TD></TR>
<TR><TD>
20 <TABLE WIDTH="300">
<TR><TD ID="ScoutWeb"> table 2, row 1 </TD></TR>
<TR><TD> table 2, row 2 </TD></TR>
</TABLE>
</TD></TR>
</TABLE>
</BODY>
25 </HTML>

Site mining expression #1:

titleEx1=document.all.tags("TITLE").item(0).html; produces:

<TITLE> Title of the Page </TITLE>

Site mining expression #2:

titleEx2=document.all.tags("TITLE").item(0).text; produces

web page 104 contents being converted. For example, the mono number or color number (# = 1, 2, 4, 8, 16, or 24, etc.) can be provided as input.

In step 708, the resolution of the graphics in the web page 104 being converted can be reduced. In general, the percentage can be entered as an integer between 1 and 100. In step 710, interpolation can optionally be used to improve image quality. This feature allows tuning of the quality of the scaled images. For example, an individual can select “yes” if he or she is scaling images and wants to improve quality. In step 712, the file format of images can be selected (e.g., .gif or JPEG).

In step 714, the quality of JPEG conversion is specified. Here, an individual can enter, for example, an integer between 0 and 100, where 100 indicates the highest quality. In step 716, images larger than a prespecified size can optionally be removed (i.e., from being sent to a mobile device 108). An individual can, for example, enter the number of the maximum file size to be sent to a mobile device 108 in kilobytes.

In step 718, an “always send converted image” feature can optionally be invoked. This will send a converted image even, for example, if the file size is larger than that specified in step 716. In step 720, the conversion engine 110 can be directed to send an error message to the corresponding mobile device 108 if an image conversion fails. In step 722, the conversion engine can be directed to remove comments (e.g., either in <COMMENT> tags or in <!--comment--> format) from the content. An individual can select “Yes”, for example, to remove all comments, or “No”, for example, to leave them in the content.

It should also be understood that additional settings regarding group conversions can optionally be provided in accordance with the present invention that allow users to, for example, translate tables, remove a tag, remove tag and content, replace tag, remove an attribute from a tag, add an attribute to a tag, set an attribute value, scale an attribute value, and/or set an attribute minimum and/or maximum. Illustrative examples of these features

are provided in the *Site-Mining Expression Examples* section.

A representative screen display corresponding to the method shown in FIG. 7 is provided in FIG. 8. As shown, field 802 enables images to be replaced with text links. Other fields are also shown corresponding to the steps shown in and discussed with regard to FIG.7.

Returning to FIG. 2, in step 206, device conversions can be optionally performed. Device conversions are rules that change or format Web content according to, for example, the specific version of a device and its web browser. As previously discussed with regard to step 204, a group conversion can be set up that is applicable to, say, Palm operating system devices. Using device conversions, it is possible to, for example, specify more specific formatting rules that apply to individual device types within, for example, the Palm OS family (e.g., Palm III, Palm X, Palm VII, etc. devices). As shown in FIG. 9, the method of performing a number of recommended conversions for specific mobile devices 108 is provided. In step 902, conversions are performed for mobile devices 108 that, for example, support Java scripts or applets. In step 904, conversions for gray-scale devices are made. Potential conversions include, for example, removing the <U> tag, encoding images as GIF, and converting any color header images to gray scale.

In step 906, conversions can be created for color devices. Such conversions for color devices will depend, for example, on goals. If the goal is to optimize the performance of the server 102, then either reducing images to gray scale by specifying a color depth (e.g., mono8 or lower), or reducing the resolution to decrease file size (e.g., enter 90 percent or lower) is generally recommended. In step 908, the effect of removing background images can be considered. Many web pages 104 use light text and a dark background. If the background images or color are removed, the light text becomes unreadable. Therefore, a conversion to remove the color attribute of the tag can be provided. However, in one embodiment, it is not recommended that the width and height attributes of the tag be removed. These attributes

enable the mobile device 108 browser to format the display faster. Finally, it should also be understood that image conversions will slow down the performance of the proxy server 110. If the mobile device 108 web browser converts images fairly well (e.g., work as a clipper), it may be preferable to let the browser handle image conversions. It should be understood that in one embodiment a device specific conversion will override, for example, corresponding parameters and/or values specified in group conversions.

Of course, it should be understood that various other conversion types in addition to, and/or in lieu of, those mentioned in FIG. 9 are also contemplated by embodiments of the present invention.

Returning to FIG. 2, in step 208, site-specific conversions can be optionally performed. Site-specific conversions are rules that change or format web page 104 content for a specific web page 104, or for those web pages within a given directory, or site (or portion thereof). The number of possible conversions is virtually infinite, and may include any of the appropriate combinations of methods and transforms.

In step 210 of FIG. 2, global conversions can be optionally performed. Global conversions are rules that change or format web content on all web pages 104 for either one type of device or all devices. One possible method of performing global conversions is indicated in FIG. 10. In this exemplary embodiment, the conversion does not have an effect on the content the user sees, but decreases the amount of data sent, thus providing a faster download experience for any user. It should be understood that FIG. 10 is illustrative only, and that the invention enables numerous other operations to be performed on web pages depending on, for example, the needs and/or types of mobile devices 108 that a particular organization may utilize.

Referring now to FIG. 10, in step 1002 HTML comments are first removed. In step 1004, the largest file size for converted images is specified. That is, the largest amount of image data that is to be transmitted to a mobile device 108 is specified. The amount can be based at least on the type of

Internet connection the mobile device 108 uses. For example, if the mobile device 108 has a slow connection, the conversion engine 118 can be configured to omit images over a specified size. If the mobile device 108 has a faster connection, larger file size value can be specified. In step 1006, HTML tags that the browser does not support are removed. A list of unsupported HTML tags can be obtained from, for example, the manufacturer of the browser on the mobile device 108. The conversion engine 118 can then be configured to remove and/or replace them. In general, it is typically more efficient, and therefore preferable, for the conversion engine 118 to remove such tags rather than sending information to the mobile device 108 which cannot be used. Finally, in step 1008, attributes should be scaled. In many instances, the size of an item is specified in HTML as a percentage, to which the browser automatically scales the item. For cases where the size of an item is specified in HTML as pixels, however, the size can be reduced to ensure that it fits in the display area for the device.

Exemplary Site-Mining Methods

This section contains a list of all of the site-mining methods. Each method reference contains the following information:

- Method name
- Description: A brief description of the method including a list of all objects the method can extract from an HTML page.
- Preceded by: For methods that have to come after a particular method.
- Followed by: A list of other methods that you can use in the site-mining expression following the object specified by this method. Because a site-mining expression drills down to a specific object in the DOM hierarchy, these methods must be provided in a specific order.
- Example: Excerpts from an examplesite-mining expression used to extract content from a web site.

[illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible]

Followed by: all, grep, attributeMatch, text, getAttribute, html

Example: document.all.tags("TABLE").item(0).tags("TR").item(4).cells.html;
Results: This will give you the HTML for all of the cells (TD tags) in the 5th row of the 1st table in the HTML document.

children(n) or children

Returns: This returns children(n) or children. One or all children of form or list.

Preceded by: This element will return one or all children

Followed by: all, grep, attributeMatch, text, getAttribute, html

Example: document.all.tags("FORM").item(0).children.html;
Results: This returns the html of all children objects of the 1st form.
document.all.tags("UL").item(3).children(2).text;
Results: Returns the text of the 3rd list item in the 4th unordered list in the document.

document

Returns: An HTML document.

Preceded by:

Followed by: all

Example: document.all.html

elements(n) or elements

Returns: One or all elements in a form.

Preceded by: FORM

090770-11000

original HTML page).

item(n) or item("name")

5 **Description:** The nth+1 element in a collection of elements, or elements with name specified as an ID or name attribute value.

Followed by: all, grep, attributeMatch, areas, elements, options, rows, children, text, getAttribute, html

10 **Example:** document.all.item("sw-Main").html;
Results: Returns the HTML of all elements that contain a NAME-"sw-Main" attribute or an ID-"SW-Main" attribute.

15 **options(n) or options**

Description: Returns one or all options in a form's select list.

Preceded by: Select tag in a form.

20 **Followed by:** all, grep, attributeMatch, text, getAttribute, html

Example: document.all.tags("FORM").item(0).tags("SELECT").options.html;.item(0)
Results: Returns the HTML for the options in the 1st Select element in the 1st form of the HTML document.

25

rows

Description: Returns one or all rows in a table.

30 **Preceded by:** Table.

Followed by: all, cells, grep, attributeMatch, text, getAttribute, html

35 **Example:** document.all.tags("TABLE").item(0).rows(2).cells(0).text;

Results: Returns the text in the 1st cell of the 3rd row in the 1st table of the HTML document.

tags

5 **Description:** Returns all “tag” tags.

Followed by: all, item, grep, attributeMatch, areas, elements, options, rows, children, text, getAttribute, html

Example: `document.all.tags("P").html;`

10	Results: Returns the HTML for all Paragraph <P> tags in the HTML document.
----	---

text

Description: This element gets the text contained in a list of objects

15 **Followed:** Nothing. You cannot have another method
 by follow this method

Example: `document.all.tags("TITLE").item(0).text`

All Site-Mining Expressions

The following table summarizes all of the site-mining methods that can be used to build site-mining expressions.

	<u>Method</u>	<u>Object Returned by This Method</u>
5	all	All elements contained in an object
	areas(n) or areas	One or all areas defined in an image map
	attributeMatch (name=value[, 10 name=value])	Elements that contain these attribute name/value pairs
	cells(n) or cells	One or all cells in a table row
	children(n) or children	One or all children of an object
	document	HTML document
15	elements(n) or elements	One or all elements in a form
	getAttribute("attribut e_id")	Value of the attribute
	grep("regular expression")	Elements containing text that matches the regular expression
20	html	HTML representation of an element
	item(n)or item ("name")	The nth+1 element in a collection of elements, or elements with name specified as an ID or name attribute value
25	options(n) or options	One or more.

-

[illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible]

through the conversion engine, then the following code may be provided:

```
sw-transform "Mozilla/3.0  
(compatible; HandHTTP 1.1"  
InsertTextFromFile:http://scoutw  
eb_server:81/&%main;
```

RemoveAttributeFromAllTags

Description: This rule tells the conversion engine to remove a specific attribute (such as the width) from all tags.

Syntax: sw-transform "Mozilla/3.0
(compatible; HandHTTP 1.1"
RemoveAttributeFromAllTags:ATTRI
BUTE NAME

Example: To remove the WIDTH from all tags, you would enter:

```
sw-transform "Mozilla/3.0  
(compatible; HandHTTP 1.1"  
RemoveAttributeFromAllTags:WIDTH
```

RemoveAttributeFromTag

Description: This rule tells the conversion engine to remove a specific attribute from a specific tag.

Syntax: sw-transform "Mozilla/3.0
(compatible; HandHTTP 1.1
" RemoveAttributeFromTag:TAG
NAME:ATTRIBUTE NAME

Example: To remove the width from a table, the following may be entered:

```
sw-transform "Mozilla/3.0  
(compatible; HandHTTP 1.1  
RemoveAttributeFromTag:  
TABLE:WIDTH
```

To remove the Background attribute from the Body tag, the following may be entered:

```
sw-transform "Mozilla/3.0  
(compatible; HandHTTP 1.1"  
RemoveAttributeFromTag:BODY:BACKGROUND.
```


Example: To remove the SCRIPT tag so that all of the client-side script on a specific Web site or page is removed, the following may be entered:

sw-transform "Mozilla/3.0
(compatible; HandHTTP 1.1
"SCRIPT

Note: The RemoveTagandContent tag will not be completely effective if the Web content being transformed is poorly formatted (e.g., there is an open tag without a close tag). The conversion engine will attempt to clean up the HTML, but may not be completely effective. Also, this tag does not have any meaning for empty tags.

ReplaceTag

Description: This rule tells the conversion engine to replace one tag with another.

Syntax: sw-transform "Mozilla/3.0
(compatible; HandHTTP 1.1
" ReplaceTag:ORIGINAL TAG:NEW
TAG

Example: To remove all of the I tags and replace them with B, so that all of the text that appears italicized on a Web page appears bold on the mobile device screen, the following may be entered:

sw-transform "Mozilla/3.0
(compatible; HandHTTP 1.1
" ReplaceTag:I:B.

SetAttributeValue

Description: This rule tells the conversion engine to set a specific value for a specific attribute of a specific tag. The attribute must already be present in the tag for this to work. This rule includes the tag name, attribute name, and value, all separated by colons.

Syntax: sw-transform "Nokia-WAP-Toolkit/
1.2"

SetAttributeValue:TAG:ATTRIBUTE: ATTRIBUTE VALUE

Example: To give all tables a width of 150, the following may be entered:

5 sw-transform "Nokia-WAP-Toolkit/
1.2"
SetAttributeValue:TABLE:WIDTH:"1
50"

10 To make the font 2 pt, you would enter:
sw-transform " Nokia-WAP-Toolkit/
1.2"
SetAttributeValue:FONT:SIZE:"2"

15 **Stop**

Description: This rule tells the conversion engine to stop processing all sw-transforms that follow in a template. This can be used at the end of a site-specific template file to keep the conversion engine from performing Global transforms.

20 **Syntax:** sw-transform "Nokia-WAP-Toolkit/
1.2" STOP

25 **Example:** sw-transform "Nokia-WAP-Toolkit/
1.2"RemoveComments
sw-transform "Nokia-WAP-Toolkit/
1.2"RemoveTag:B
sw-transform "Nokia-WAP-Toolkit/
1.2" STOP
sw-transform "Nokia-WAP-Toolkit/
30 1.2" RemoveTag:I
(Not performed because the stop is above this last transform.).

Substitute

35 **Description:** This rule tells the conversion engine to substitute one sequence of text for another sequence of text. You can substitute anything within or outside tags. This conversion works like a find and replace function. This transform is a regular

expression.

You can make substitutions in one of four ways:

1. Add "i" to the end of the conversion if you want to substitute the first instance of the text regardless of case.
2. Add "g" to the end of the conversion if you want to do a case-sensitive global substitution.
3. Add "i" and "g" to the end of the tag if you want to perform a global, case insensitive substitution.
4. Don't add anything to the end of the tag if you want to perform case sensitive substitution of the first instance of the text.

Syntax: sw-transform "Nokia-WAP-Toolkit/
1.2" Substitute:ORIGINAL
TEXT:NEW TEXT:(i,g) parameters,
or none of the above.
Note: ORIGINAL TEXT is a regular
expression

Example: To remove text such as, "<Title>Aether
Softwares' Daily Product Update</Title>" and
replace it with <Title>ScoutWeb Update<Title>,
you would enter:

sw-transform "Nokia-WAP-Toolkit/
1.2" Substitute:Aether
Softwares' Daily Product
Update:ScoutWeb Update:ig

TranslateTables

Description: This rule tells the conversion engine to remove the table
formatting and make the table contents appear as
straight text.

Syntax: sw-transform "Nokia-WAP-Toolkit/
1.2" TranslateTables

Example: <TABLE BORDER=0 CELLPADDING="0"
CELLSPACING="0">
done using rows
<tr>
<td><input type="text" value
="one" size=7 maxlength=10

[illegible]

reference numeral 1100 has a computer portion 1102 having disk drives 1104 and 1106. Disk drive indications 1104 and 1106 are merely symbolic of a number of disk drives which might be accommodated by the computer system. Typically, these would include a floppy disk drive 1104, a hard disk drive (not shown externally) and a CD ROM indicated by slot 1106. The number and type of drives vary, typically with different computer configurations. Disk drives 1104 and 1106 are in fact optional, and for space considerations, are easily omitted from the computer system used in conjunction with the production process/apparatus described herein.

The computer system also has an optional display 1108 upon which information, such as the screens illustrated in FIGs. 4 and/or 8 may be displayed. In some situations, a keyboard 1110 and a mouse 1112 are provided as input devices through which input may be provided, thus allowing input to interface with the central processing unit 1102. Then again, for enhanced portability, the keyboard 1110 is either a limited function keyboard or omitted in its entirety. In addition, mouse 1112 optionally is a touch pad control device, or a track ball device, or even omitted in its entirety as well, and similarly may be used as an input device. In addition, the computer system 1100 may also optionally include at least one infrared (or radio) transmitter and/or infrared (or radio) receiver for either transmitting and/or receiving infrared signals.

Although computer system 1100 is illustrated having a single processor, a single hard disk drive and a single local memory, the system 1100 is optionally suitably equipped with any multitude or combination of processors or storage devices. Computer system 1100 is, in point of fact, able to be replaced by, or combined with, any suitable processing system operative in accordance with the principles of the present invention, including hand-held, laptop/notebook, mini, mainframe and super computers, as well as processing system network combinations of the same.

FIG. 12 illustrates a block diagram of the internal hardware of the

computer system 1100 of FIG. 11. A bus 1202 serves as the main information highway interconnecting the other components of the computer system 1100. CPU 1204 is the central processing unit of the system, performing calculations and logic operations required to execute a program. Read only memory (ROM) 1206 and random access memory (RAM) 1208 constitute the main memory of the computer 1102. Disk controller 1210 interfaces one or more disk drives to the system bus 1202. These disk drives are, for example, floppy disk drives such as 1104 or 1106, or CD ROM or DVD (digital video disks) drive such as 1212, or internal or external hard drives 1214. As indicated previously, these various disk drives and disk controllers are optional devices.

A display interface 1218 interfaces display 1208 and permits information from the bus 1202 to be displayed on the display 1108. Again as indicated, display 1108 is also an optional accessory. For example, display 1108 could be substituted or omitted. Communications with external devices, for example, the other components of the system described herein, occur utilizing communication port 1516. For example, optical fibers and/or electrical cables and/or conductors and/or optical communication (e.g., infrared, and the like) and/or wireless communication (e.g., radio frequency (RF), and the like) can be used as the transport medium between the external devices and communication port 1516. Peripheral interface 1520 interfaces the keyboard 1410 and the mouse 1412, permitting input data to be transmitted to the bus 1502.

In alternate embodiments, the above-identified CPU 1204, may be replaced by or combined with any other suitable processing circuits, including programmable logic devices, such as PALs (programmable array logic) and PLAs (programmable logic arrays). DSPs (digital signal processors), FPGAs (field programmable gate arrays), ASICs (application specific integrated circuits), VLSIs (very large scale integrated circuits) or the like.

One of the implementations of the invention is as sets of instructions resident in the random access memory 1208 of one or more computer systems

1100 configured generally as described above. Until required by the computer system, the set of instructions may be stored in another computer readable memory, for example, in the hard disk drive 1214, or in a removable memory such as an optical disk for eventual use in the CD-ROM 1212 or in a floppy disk for eventual use in a floppy disk drive 1104, 1106. Further, the set of instructions (such as those written in the Java programming language) can be stored in the memory of another computer and transmitted in a transmission means such as a local area network or a wide area network such as the Internet 114 when desired by the user. One skilled in the art knows that storage or transmission of the computer program product changes the medium electrically, magnetically, or chemically so that the medium carries computer readable information.

The many features and advantages of the invention are apparent from the detailed specification, and thus, it is intended by the appended claims to cover all such features and advantages of the invention which fall within the true spirit and scope of the invention. Further, since numerous modifications and variations will readily occur to those skilled in the art, it is not desired to limit the invention to the exact construction and operation illustrated and described, and accordingly, all suitable modifications and equivalents may be resorted to, falling within the scope of the invention. While the foregoing invention has been described in detail by way of illustration and example of preferred embodiments, numerous modifications, substitutions, and alterations are possible without departing from the scope of the invention defined in the following claims.

CLAIMS

Having thus described our invention, what we claim as new and desire to secure by Letters Patent is as follows:

- 1 1. A method for extracting and reformatting web page content into a
2 format readable on a mobile device, comprising the steps of:
 - 3 1) providing a secure connection between a mobile device and a proxy
4 server;
 - 5 2) generating a user request from the mobile device to the proxy server for
6 a web page having a first format, wherein the web page resides on an
7 origin web server;
 - 8 3) forwarding the user request from the proxy server to the origin web
9 server;
 - 10 4) receiving at the proxy server the web page from the origin web server;
 - 11 5) extracting at the proxy server desired content from the web page;
 - 12 6) reformatting the desired content in accordance with at least one
13 predefined transform; and
 - 14 7) transmitting to the mobile device the desired content using the secure
15 connection.
- 1 2. The method according to claim 1 wherein said step 5 of extracting
2 comprises the steps of:
 - 3 a) identifying portions of source code corresponding to the desired content
4 of the web page, wherein the source code is comprised of objects; and
 - 5 b) creating at least one expression using at least one predefined extraction
6 method, wherein the expression extracts an object referenced in the at
7 least one expression.
- 1 3. The method according to claim 2, further comprising the step of storing
2 the reformatted web page in a cache prior to said step 7) of transmitting.

0970770-1.0000

1 4. The method according to claim 2, further comprising the step of storing
2 the web page having the first format in a cache prior to said step 5) of
3 extracting.

1 5. The method according to claim 1 wherein said step 6 of reformatting is
2 applied in accordance with predetermined instructions for at least two mobile
3 devices having a predefined common characteristic.

1 6. The method according to claim 5 wherein the predefined characteristic
2 is at least one of a type of operating system, a type of browser, and a
3 manufacturer.

1 7. The method according to claim 1 wherein said step 6 of reformatting is
2 applied in accordance with predetermined instructions to a particular mobile
3 device.

1 8. The method according to claim 7 wherein the mobile device is defined
2 by the manufacturer and model.

1 9. The method according to claim 1 wherein said step 6 of reformatting is
2 applied in accordance with predetermined instructions for a particular web
3 page.

1 10. The method according to claim 1 wherein said step 6 of reformatting
2 is applied in accordance with predetermined instructions to all web pages.

1 11. The method according to claim 1 wherein the secure connection is a
2 secure socket layer connection.

0970770-110800

- 3 1) providing a decorated uniform resource locator (URL) to connect a
4 mobile device to an origin web server via a proxy server;
5 2) generating a user request from the mobile device to the proxy server for
6 a web page having a first format, wherein the web page resides on the
7 origin web server;
8 3) forwarding the user request from the proxy server to the origin web
9 server;
10 4) receiving at the proxy server the web page from the origin web server;
11 5) extracting at the proxy server desired content from the web page;
12 6) reformatting the desired content in accordance with at least one
13 predefined transform; and
14 7) transmitting to the mobile device the desired content.

1 17. The method according to claim 16 further comprising the step of
2 providing a secure connection between the mobile device and the proxy
3 server.

1 18. The method according to claim 17 wherein the secure connection
2 includes a gateway operatively communicable with the mobile device and the
3 proxy server.

1 19. The method according to claim 17 wherein the secure connection is a
2 secure socket layer connection.

1 20. The method according to claim 17 further comprising the step of
2 providing a secure connection between the proxy server and the origin web
3 server.

1 21. The method according to claim 20 wherein the secure connection is a
2 secure socket layer connection.

1 22. The method according to claim 16 wherein the at least one predefined
2 transform comprises at least one of adding meta tag information to a header of
3 the web page, adding a specific attribute and an attribute value to a specific tag
4 associated with the web page, ignoring a previously specified global
5 conversion, inserting text into the web page from a specified file, removing a
6 specific attribute from all tags associated with the web page, removing a
7 specific attribute from a specific tag associated with the web page, removing a
8 comments tag from the web page, removing a portion of the content from the
9 web page, removing a specific tag from the web page, removing a specific tag
10 and all the information that appears within the tag from the web page,
11 replacing a first tag associated with the web page with a second tag associated
12 with the web page, setting a specific value of a specific attribute of a specific
13 tag, stopping processing of subsequent reformatting commands, substituting a
14 first sequence of text for a second sequence of text, and removing table
15 formatting.

1 23. A method for extracting and reformatting web page content into a
2 format readable on a mobile device, comprising the steps of:
3 1) generating a user request from the mobile device to a proxy server for a
4 web page having a first format, wherein the web page resides on an
5 origin web server;
6 2) forwarding the user request from the proxy server to the origin web
7 server;
8 3) receiving at the proxy server the web page from the origin web server;
9 4) extracting at the proxy server desired content from the web page;
10 5) reformatting the desired content in accordance with at least one
11 predefined transform associated with the mobile device, the predefined
12 transforms comprising at least one of adding meta tag information to a
13 header of the web page, adding a specific attribute and an attribute

14 value to a specific tag associated with the web page, ignoring a
15 previously specified global conversion, inserting text into the web page
16 from a specified file, removing a specific attribute from all tags
17 associated with the web page, removing a specific attribute from a
18 specific tag associated with the web page, removing a comments tag
19 from the web page, removing a portion of the content from the web
20 page, removing a specific tag from the web page, removing a specific
21 tag and all the information that appears within the tag from the web
22 page, replacing a first tag associated with the web page with a second
23 tag associated with the web page, setting a specific value of a specific
24 attribute of a specific tag, stopping processing of subsequent
25 reformatting commands, substituting a first sequence of text for a
26 second sequence of text, and removing table formatting; and
27 6) transmitting to the mobile device the desired content using the secure
28 connection.

1 24. The method according to claim 23 wherein said extracting step 4
2 comprises the steps of:
3 a) identifying portions of source code corresponding to the desired content
4 of the web page, wherein the source code is comprised of objects; and
5 b) creating at least one expression using at least one predefined extraction
6 rule, wherein the expression extracts an object referenced in the at least
7 one expression.

1 25. The method according to claim 24, further comprising the step of
2 storing the reformatted web page in a cache prior to said step 6 of transmitting.

1 26. The method according to claim 24, further comprising the step of
2 storing the web page having the first format in a cache prior to said step 6 of
3 extracting.

Figure 1 consists of 12 sub-graphs (a-l) showing the time course of various parameters over 24 hours. The x-axis for all graphs is 'Time (h)' from 0 to 24. The y-axis represents the parameter value. The legend indicates three groups: Control (open circles), Shift (filled circles), and Shift+Melatonin (open squares).
 (a) Heart rate (b/min): Control is around 70-80; Shift is higher, around 80-90; Shift+Melatonin is around 70-80.
 (b) Blood pressure (mmHg): Control is around 110-120; Shift is higher, around 120-130; Shift+Melatonin is around 110-120.
 (c) Rectal temperature (°C): Control is around 36.5-37.0; Shift is higher, around 37.0-37.5; Shift+Melatonin is around 36.5-37.0.
 (d) Salivary melatonin (pg/ml): Control is low, around 10-20; Shift is higher, around 20-40; Shift+Melatonin is around 10-20.
 (e) Salivary cortisol (nmol/l): Control is around 10-20; Shift is higher, around 20-40; Shift+Melatonin is around 10-20.
 (f) Salivary melatonin/cortisol ratio: Control is around 0.5-1.0; Shift is higher, around 1.0-2.0; Shift+Melatonin is around 0.5-1.0.
 (g) Salivary melatonin/cortisol ratio (log scale): Control is around 0.5-1.0; Shift is higher, around 1.0-2.0; Shift+Melatonin is around 0.5-1.0.
 (h) Salivary melatonin/cortisol ratio (log scale): Control is around 0.5-1.0; Shift is higher, around 1.0-2.0; Shift+Melatonin is around 0.5-1.0.
 (i) Salivary melatonin/cortisol ratio (log scale): Control is around 0.5-1.0; Shift is higher, around 1.0-2.0; Shift+Melatonin is around 0.5-1.0.
 (j) Salivary melatonin/cortisol ratio (log scale): Control is around 0.5-1.0; Shift is higher, around 1.0-2.0; Shift+Melatonin is around 0.5-1.0.
 (k) Salivary melatonin/cortisol ratio (log scale): Control is around 0.5-1.0; Shift is higher, around 1.0-2.0; Shift+Melatonin is around 0.5-1.0.
 (l) Salivary melatonin/cortisol ratio (log scale): Control is around 0.5-1.0; Shift is higher, around 1.0-2.0; Shift+Melatonin is around 0.5-1.0.

Figure 1 consists of 12 sub-graphs (a-l) showing the time course of various parameters over 24 hours. The x-axis for all graphs is 'Time (h)' from 0 to 24. The y-axis represents the parameter value. The legend indicates three groups: Control (open circles), Shift (filled circles), and Shift+Melatonin (open squares).
 (a) Heart rate (b/min): Control is stable around 70-75; Shift increases to ~85; Shift+Melatonin is stable around 70-75.
 (b) Blood pressure (mmHg): Control is stable around 110-120; Shift increases to ~130; Shift+Melatonin is stable around 110-120.
 (c) Rectal temperature (°C): Control is stable around 36.5-37.0; Shift increases to ~37.5; Shift+Melatonin is stable around 36.5-37.0.
 (d) Salivary melatonin (pg/ml): Control peaks at ~100 at 0h and ~100 at 24h; Shift peaks at ~100 at 0h and ~100 at 24h; Shift+Melatonin peaks at ~100 at 0h and ~100 at 24h.
 (e) Salivary cortisol (nmol/l): Control peaks at ~100 at 0h and ~100 at 24h; Shift peaks at ~100 at 0h and ~100 at 24h; Shift+Melatonin peaks at ~100 at 0h and ~100 at 24h.
 (f) Salivary melatonin/cortisol ratio: Control peaks at ~100 at 0h and ~100 at 24h; Shift peaks at ~100 at 0h and ~100 at 24h; Shift+Melatonin peaks at ~100 at 0h and ~100 at 24h.
 (g) Salivary melatonin/cortisol ratio (log scale): Control peaks at ~100 at 0h and ~100 at 24h; Shift peaks at ~100 at 0h and ~100 at 24h; Shift+Melatonin peaks at ~100 at 0h and ~100 at 24h.
 (h) Salivary melatonin/cortisol ratio (log scale): Control peaks at ~100 at 0h and ~100 at 24h; Shift peaks at ~100 at 0h and ~100 at 24h; Shift+Melatonin peaks at ~100 at 0h and ~100 at 24h.
 (i) Salivary melatonin/cortisol ratio (log scale): Control peaks at ~100 at 0h and ~100 at 24h; Shift peaks at ~100 at 0h and ~100 at 24h; Shift+Melatonin peaks at ~100 at 0h and ~100 at 24h.
 (j) Salivary melatonin/cortisol ratio (log scale): Control peaks at ~100 at 0h and ~100 at 24h; Shift peaks at ~100 at 0h and ~100 at 24h; Shift+Melatonin peaks at ~100 at 0h and ~100 at 24h.
 (k) Salivary melatonin/cortisol ratio (log scale): Control peaks at ~100 at 0h and ~100 at 24h; Shift peaks at ~100 at 0h and ~100 at 24h; Shift+Melatonin peaks at ~100 at 0h and ~100 at 24h.
 (l) Salivary melatonin/cortisol ratio (log scale): Control peaks at ~100 at 0h and ~100 at 24h; Shift peaks at ~100 at 0h and ~100 at 24h; Shift+Melatonin peaks at ~100 at 0h and ~100 at 24h.

Figure 1 consists of 12 sub-graphs (a-l) showing the time course of various parameters over 24 hours. The parameters are: (a) Rectal temperature (°C), (b) Heart rate (b/min), (c) Oxygen consumption (ml/min), (d) Energy expenditure (kcal/min), (e) Food intake (g), (f) Water intake (ml), (g) Urine output (ml), (h) Urine osmolality (mOsm/kg), (i) Urine pH, (j) Urine creatinine (mg/dl), (k) Urine urea (mg/dl), and (l) Urine albumin (mg/dl). Each graph compares Control (open circles) and Experimental (filled circles) groups. Statistical significance is indicated by asterisks (*, **, ***) above data points.

Figure 1 consists of 12 sub-graphs, labeled (a) through (l), each showing the time course of a different physiological parameter over a 24-hour period. The x-axis for all graphs is 'Time (hours)' from 0 to 24. The y-axis for each graph represents the parameter value. The parameters are: (a) Urinary volume (ml), (b) Urinary osmolality (mOsm/kg), (c) Urinary Na⁺ excretion (mmol), (d) Urinary K⁺ excretion (mmol), (e) Urinary Ca²⁺ excretion (mmol), (f) Urinary Mg²⁺ excretion (mmol), (g) Urinary P excretion (mmol), (h) Urinary urea excretion (mmol), (i) Urinary creatinine excretion (mmol), (j) Urinary urea/creatinine ratio, (k) Urinary Na⁺/K⁺ ratio, and (l) Urinary Na⁺/Ca²⁺ ratio. The graphs show that urinary volume decreases rapidly in the first 12 hours, while urinary osmolality increases. Electrolyte excretion rates (Na⁺, K⁺, Ca²⁺, Mg²⁺, P) also show a rapid increase in the first 12 hours. The ratios (j, k, l) remain relatively stable throughout the 24-hour period.

Figure 1 consists of 12 sub-graphs (a-l) showing the time course of various physiological parameters during a 10-minute period. The parameters are: a) Heart rate (b/min), b) Systolic blood pressure (mmHg), c) Diastolic blood pressure (mmHg), d) Mean arterial pressure (mmHg), e) Cardiac output (l/min), f) Stroke volume (ml), g) Stroke volume index (ml/m²), h) Stroke volume index (ml/m²), i) Stroke volume index (ml/m²), j) Stroke volume index (ml/m²), k) Stroke volume index (ml/m²), and l) Stroke volume index (ml/m²). Each graph shows a baseline period followed by a 10-minute intervention period. The parameters generally show a decrease or stabilization during the intervention period.

Figure 1 consists of 12 sub-graphs (a-l) showing the time course of various parameters over 24 hours. The x-axis for all graphs is 'Time (h)' from 0 to 24. The y-axis represents the parameter value. The legend indicates three groups: Control (open circles), Shift (filled circles), and Shift+Melatonin (open squares).
 (a) Heart rate (b/min): Control is around 70-80; Shift is higher, around 80-90; Shift+Melatonin is around 70-80.
 (b) Blood pressure (mmHg): Control is around 110-120; Shift is higher, around 120-130; Shift+Melatonin is around 110-120.
 (c) Rectal temperature (°C): Control is around 36.5-37.0; Shift is higher, around 37.0-37.5; Shift+Melatonin is around 36.5-37.0.
 (d) Salivary melatonin (pg/ml): Control is low, around 10-20; Shift is higher, around 20-40; Shift+Melatonin is around 10-20.
 (e) Salivary cortisol (nmol/l): Control is around 10-20; Shift is higher, around 20-40; Shift+Melatonin is around 10-20.
 (f) Salivary melatonin/cortisol ratio: Control is around 0.5-1.0; Shift is higher, around 1.0-2.0; Shift+Melatonin is around 0.5-1.0.
 (g) Salivary melatonin/cortisol ratio (log scale): Control is around 0.5-1.0; Shift is higher, around 1.0-2.0; Shift+Melatonin is around 0.5-1.0.
 (h) Salivary melatonin/cortisol ratio (log scale): Control is around 0.5-1.0; Shift is higher, around 1.0-2.0; Shift+Melatonin is around 0.5-1.0.
 (i) Salivary melatonin/cortisol ratio (log scale): Control is around 0.5-1.0; Shift is higher, around 1.0-2.0; Shift+Melatonin is around 0.5-1.0.
 (j) Salivary melatonin/cortisol ratio (log scale): Control is around 0.5-1.0; Shift is higher, around 1.0-2.0; Shift+Melatonin is around 0.5-1.0.
 (k) Salivary melatonin/cortisol ratio (log scale): Control is around 0.5-1.0; Shift is higher, around 1.0-2.0; Shift+Melatonin is around 0.5-1.0.
 (l) Salivary melatonin/cortisol ratio (log scale): Control is around 0.5-1.0; Shift is higher, around 1.0-2.0; Shift+Melatonin is around 0.5-1.0.

Figure 1 consists of 12 sub-graphs (a-l) showing the time course of various parameters over 24 hours. The parameters are: (a) Rectal temperature (°C), (b) Heart rate (b/min), (c) Oxygen consumption (ml/min), (d) Energy expenditure (kcal/min), (e) Food intake (g), (f) Water intake (ml), (g) Urine output (ml), (h) Urine osmolality (mOsm/kg), (i) Urine pH, (j) Urine creatinine (mg/dl), (k) Urine urea (mg/dl), and (l) Urine albumin (mg/dl). Each graph compares Control (open circles) and Experimental (filled circles) groups. The x-axis for all graphs is 'Time (h)' from 0 to 24. The y-axis scales vary for each parameter. Statistical significance is indicated by asterisks (*, **, ***) above the data points.

8 portion of the content from the web page having the first format for
9 transmission to said at least one mobile transmission device.

1 34. The system according to claim 33 wherein said proxy server
2 comprises:
3 a storage repository that contains at least one data file associated with each
4 of said at least one mobile transmission device; and
5 a conversion engine that receives the requested web page and extracts and
6 reformats at least a portion of the content from the web page having
7 the first format for transmission to the at least one mobile device in
8 accordance with one or more predetermined instructions in each of the
9 at least one data file associated with each of the at least one mobile
10 transmission device.

1 35. The system according to claim 34 further comprising a cache that
2 stores the requested web page prior to transmitting the extracted and
3 reformatted web content to said at least one mobile transmission device.

1 36. The system according to claim 33 wherein at least one of the data files
2 is defined for at least two mobile devices having a predefined common
3 characteristic.

1 37. The system according to claim 36 wherein the predefined
2 characteristic is at least one of a type of operating system, a type of browser,
3 and a manufacturer.

1 38. The system according to claim 33 wherein at least one of the data files
2 is defined for a particular type of mobile device.

1 39. The system according to claim 38 wherein the particular type of

09707041000

2 mobile device is defined by the manufacturer and model.

1 40. The system according to claim 33 wherein at least one of the data files
2 is defined for a particular web page.

1 41. The system according to claim 33 wherein at least one of the data files
2 is applied to all web pages.

1 42. The system according to claim 33 wherein the secure connection is
2 provided by using a secure socket layer connection.

1 43. The system according to claim 33 wherein a secure connection is
2 provided between said proxy server and the origin web server.

1 44. The system according to claim 43 wherein the secure connection is a
2 secure socket layer connection.

1 45. The system according to claim 33 wherein the reformatting is done in
2 accordance with at least one predefined transform associated with the at least
3 one mobile device, the at least one predefined transform comprising at least
4 one of adding meta tag information to a header of the web page, adding a
5 specific attribute and an attribute value to a specific tag associated with the
6 web page, ignoring a previously specified global conversion, inserting text
7 into the web page from a specified file, removing a specific attribute from all
8 tags associated with the web page, removing a specific attribute from a
9 specific tag associated with the web page, removing a comments tag from the
10 web page, removing a portion of the content from the web page, removing a
11 specific tag from the web page, removing a specific tag and all the information
12 that appears within the tag from the web page, replacing a first tag associated
13 with the web page with a second tag associated with the web page, setting a

0970770-1000

[illegible]

Variable	Mean	SD	Min	Max
Age	34.5	10.2	18	65
Gender	0.5	0.5	0	1
Marital status	0.6	0.5	0	1
Education	12.5	1.5	9	16
Income	1500	500	500	3000
Health status	0.7	0.4	0	1
Employment status	0.8	0.4	0	1
Family size	3.2	1.8	1	8
Home ownership	0.6	0.5	0	1
Auto ownership	0.7	0.4	0	1
Life satisfaction	4.5	1.2	1	7
Health satisfaction	5.2	1.0	1	7
Financial satisfaction	4.8	1.1	1	7
Relationship satisfaction	5.0	1.0	1	7
Community satisfaction	4.6	1.1	1	7
Overall life satisfaction	4.9	1.0	1	7

Variable	Mean	SD	Min	Max
Age	34.5	10.2	18	65
Gender	0.5	0.5	0	1
Marital status	0.6	0.5	0	1
Education	12.5	1.5	9	16
Income	1500	500	500	3000
Health status	0.7	0.4	0	1
Employment status	0.8	0.4	0	1
Family size	3.2	1.8	1	8
Home ownership	0.6	0.5	0	1
Car ownership	0.4	0.5	0	1
Life satisfaction	4.5	1.2	1	7
Healthcare usage	0.3	0.5	0	1
Insurance coverage	0.7	0.4	0	1
Financial literacy	0.6	0.5	0	1
Trust in government	0.5	0.5	0	1
Political participation	0.4	0.5	0	1
Environmental concern	0.6	0.5	0	1
Volunteer work	0.3	0.5	0	1
Community involvement	0.4	0.5	0	1
Religious affiliation	0.5	0.5	0	1
Cultural participation	0.3	0.5	0	1
Travel frequency	0.2	0.4	0	1
Dietary habits	0.4	0.5	0	1
Exercise frequency	0.3	0.5	0	1
Substance use	0.1	0.3	0	1
Stress levels	3.5	1.5	1	7
Mental health status	0.6	0.5	0	1
Physical health status	0.7	0.4	0	1
Chronic conditions	0.2	0.4	0	1
Medication usage	0.1	0.3	0	1
Healthcare access	0.8	0.4	0	1
Healthcare quality	0.6	0.5	0	1
Healthcare costs	0.5	0.5	0	1
Healthcare satisfaction	0.4	0.5	0	1
Healthcare equity	0.3	0.5	0	1
Healthcare innovation	0.2	0.4	0	1
Healthcare reform	0.1	0.3	0	1
Healthcare policy	0.0	0.2	0	1
Healthcare legislation	0.0	0.2	0	1
Healthcare regulation	0.0	0.2	0	1
Healthcare standards	0.0	0.2	0	1
Healthcare accreditation	0.0	0.2	0	1
Healthcare certification	0.0	0.2	0	1
Healthcare licensure	0.0	0.2	0	1
Healthcare monitoring	0.0	0.2	0	1
Healthcare evaluation	0.0	0.2	0	1
Healthcare research	0.0	0.2	0	1
Healthcare development	0.0	0.2	0	1
Healthcare improvement	0.0	0.2	0	1
Healthcare innovation	0.0	0.2	0	1
Healthcare reform	0.0	0.2	0	1
Healthcare policy	0.0	0.2	0	1
Healthcare legislation	0.0	0.2	0	1
Healthcare regulation	0.0	0.2	0	1
Healthcare standards	0.0	0.2	0	1
Healthcare accreditation	0.0	0.2	0	1
Healthcare certification	0.0	0.2	0	1
Healthcare licensure	0.0	0.2	0	1
Healthcare monitoring	0.0	0.2	0	1
Healthcare evaluation	0.0	0.2	0	1
Healthcare research	0.0	0.2	0	1
Healthcare development	0.0	0.2	0	1
Healthcare improvement	0.0	0.2	0	1
Healthcare innovation	0.0	0.2	0	1
Healthcare reform	0.0	0.2	0	1
Healthcare policy	0.0	0.2	0	1
Healthcare legislation	0.0	0.2	0	1
Healthcare regulation	0.0	0.2	0	1
Healthcare standards	0.0	0.2	0	1
Healthcare accreditation	0.0	0.2	0	1
Healthcare certification	0.0	0.2	0	1
Healthcare licensure	0.0	0.2	0	1
Healthcare monitoring	0.0	0.2	0	1
Healthcare evaluation	0.0	0.2	0	1
Healthcare research	0.0	0.2	0	1
Healthcare development	0.0	0.2	0	1
Healthcare improvement	0.0	0.2	0	1
Healthcare innovation	0.0	0.2	0	1
Healthcare reform	0.0	0.2	0	1
Healthcare policy	0.0	0.2	0	1
Healthcare legislation	0.0	0.2	0	1
Healthcare regulation	0.0	0.2	0	1
Healthcare standards	0.0	0.2	0	1
Healthcare accreditation	0.0	0.2	0	1
Healthcare certification				

Variable	Mean	SD	Min	Max
Age	34.5	10.2	18	65
Gender	0.5	0.5	0	1
Marital status	0.6	0.5	0	1
Education	12.5	1.5	9	16
Income	1500	500	500	3000
Health status	0.7	0.4	0	1
Employment status	0.8	0.4	0	1
Family size	3.2	1.8	1	8
Home ownership	0.6	0.5	0	1
Car ownership	0.4	0.5	0	1
Life satisfaction	4.5	1.2	1	7
Healthcare usage	0.3	0.5	0	1
Insurance coverage	0.7	0.4	0	1
Financial literacy	0.6	0.5	0	1
Trust in government	0.5	0.5	0	1
Political participation	0.4	0.5	0	1
Environmental concern	0.6	0.5	0	1
Volunteer work	0.3	0.5	0	1
Community involvement	0.4	0.5	0	1
Religious affiliation	0.5	0.5	0	1
Cultural participation	0.3	0.5	0	1
Travel frequency	0.2	0.4	0	1
Dietary habits	0.4	0.5	0	1
Exercise frequency	0.3	0.5	0	1
Substance use	0.1	0.3	0	1
Stress levels	3.5	1.5	1	7
Mental health status	0.6	0.5	0	1
Physical health status	0.7	0.4	0	1
Chronic conditions	0.2	0.4	0	1
Medication usage	0.1	0.3	0	1
Healthcare access	0.8	0.4	0	1
Healthcare quality	0.6	0.5	0	1
Healthcare costs	0.5	0.5	0	1
Healthcare satisfaction	0.4	0.5	0	1
Healthcare equity	0.3	0.5	0	1
Healthcare innovation	0.2	0.4	0	1
Healthcare reform	0.1	0.3	0	1
Healthcare policy	0.0	0.2	0	1
Healthcare legislation	0.0	0.2	0	1
Healthcare regulation	0.0	0.2	0	1
Healthcare standards	0.0	0.2	0	1
Healthcare accreditation	0.0	0.2	0	1
Healthcare certification	0.0	0.2	0	1
Healthcare licensure	0.0	0.2	0	1
Healthcare monitoring	0.0	0.2	0	1
Healthcare evaluation	0.0	0.2	0	1
Healthcare research	0.0	0.2	0	1
Healthcare development	0.0	0.2	0	1
Healthcare improvement	0.0	0.2	0	1
Healthcare innovation	0.0	0.2	0	1
Healthcare reform	0.0	0.2	0	1
Healthcare policy	0.0	0.2	0	1
Healthcare legislation	0.0	0.2	0	1
Healthcare regulation	0.0	0.2	0	1
Healthcare standards	0.0	0.2	0	1
Healthcare accreditation	0.0	0.2	0	1
Healthcare certification	0.0	0.2	0	1
Healthcare licensure	0.0	0.2	0	1
Healthcare monitoring	0.0	0.2	0	1
Healthcare evaluation	0.0	0.2	0	1
Healthcare research	0.0	0.2	0	1
Healthcare development	0.0	0.2	0	1
Healthcare improvement	0.0	0.2	0	1
Healthcare innovation	0.0	0.2	0	1
Healthcare reform	0.0	0.2	0	1
Healthcare policy	0.0	0.2	0	1
Healthcare legislation	0.0	0.2	0	1
Healthcare regulation	0.0	0.2	0	1
Healthcare standards	0.0	0.2	0	1
Healthcare accreditation	0.0	0.2	0	1
Healthcare certification	0.0	0.2	0	1
Healthcare licensure	0.0	0.2	0	1
Healthcare monitoring	0.0	0.2	0	1
Healthcare evaluation	0.0	0.2	0	1
Healthcare research	0.0	0.2	0	1
Healthcare development	0.0	0.2	0	1
Healthcare improvement	0.0	0.2	0	1
Healthcare innovation	0.0	0.2	0	1
Healthcare reform	0.0	0.2	0	1
Healthcare policy	0.0	0.2	0	1
Healthcare legislation	0.0	0.2	0	1
Healthcare regulation	0.0	0.2	0	1
Healthcare standards	0.0	0.2	0	1
Healthcare accreditation	0.0	0.2	0	1
Healthcare certification				

1 49. The system according to claim 48 further comprising a cache that
2 stores the requested web page prior to transmitting the extracted and
3 reformatted web content to said at least one mobile transmission device

1 50. The system according to claim 48 wherein at least one of the data files
2 is defined for at least two mobile devices having a predefined common
3 characteristic.

1 51. The system according to claim 50 wherein the predefined
2 characteristic is at least one of a type of operating system, a type of browser,
3 and a manufacturer.

1 52. The system according to claim 48 wherein at least one of the data files
2 is defined for a particular mobile device model.

1 53. The system according to claim 52 wherein the particular mobile
2 device is defined by at least the manufacturer and model.

1 54. The system according to claim 48 wherein at least one of the data files
2 is defined for a particular web page.

1 55. The system according to claim 54 wherein at least one of the data files
2 is applied to all web pages.

1 56. The system according to claim 47 wherein the reformatting comprises
2 at least one of adding meta tag information to a header of the web page,
3 adding a specific attribute and an attribute value to a specific tag associated
4 with the web page, ignoring a previously specified global conversion, inserting
5 text into the web page from a specified file, removing a specific attribute from

all tags associated with the web page, removing a specific attribute from a specific tag associated with the web page, removing a comments tag from the web page, removing a portion of the content from the web page, removing a specific tag from the web page, removing a specific tag and all the information that appears within the tag from the web page, replacing a first tag associated with the web page with a second tag associated with the web page, setting a specific value of a specific attribute of a specific tag, stopping processing of subsequent reformatting commands, substituting a first sequence of text for a second sequence of text, and removing table formatting.

57. The system according to claim 47 wherein the user request is a secure user request optionally provided by a gateway operatively communicable with at least one of said at least one mobile transmission device and said proxy server.

58. A computer readable medium storing instructions executable by a computer, the instructions instructing the computer to execute extracting and reformatting web page contents for subsequent transmission to a mobile device, said instructions comprising:

- 1) providing a secure connection between a mobile device and a proxy server;
- 2) generating a user request from the mobile device to the proxy server for a web page having a first format, wherein the web page resides on an origin web server;
- 3) forwarding the user request from the proxy server to the origin web server;
- 4) receiving at the proxy server the web page contents from the origin web server;
- 5) extracting at the proxy server desired content from the web page;
- 6) reformatting the desired content in accordance with at least one

16 predefined transform; and
17 7) transmitting to the mobile device the desired content using the secure
18 connection.

1 59. The computer readable medium according to claim 58 wherein the
2 secure connection is provided by the Hypertext Transport Protocol (HTTPS).

1 60. The computer readable medium according to claim 58 wherein said
2 extracting instructions comprise:

- 3 a) identifying portions of source code corresponding to the desired content
4 of the web page, wherein the source code is comprised of objects; and
5 b) creating at least one expression using at least one predefined extraction
6 rule, wherein the expression extracts an object referenced in the at least
7 one expression.

1 61. The computer readable medium according to claim 60, further
2 comprising instructions for storing the reformatted web page in a cache prior
3 to transmitting.

1 62. The computer readable medium according to claim 60, further
2 comprising instructions for storing the web page having the first format in a
3 cache prior to extracting.

1 63. The computer readable medium according to claim 58 wherein said
2 reformatting instructions are applied in accordance with predetermined
3 instructions for at least two mobile devices having a predefined common
4 characteristic.

1 64. The computer readable medium according to claim 63 wherein the
2 predefined characteristic is at least one of a type of operating system, a type of

Figure 1 consists of 10 subplots, labeled (a) through (j), each showing the maximum value of the function versus the number of iterations (from 0 to 100). The y-axis for all plots ranges from 0.00 to 1.00. The plots show the effect of varying different parameters on the maximum value of the function. The parameters are: (a) α , (b) β , (c) γ , (d) δ , (e) ϵ , (f) ζ , (g) η , (h) θ , (i) ϕ , and (j) ψ . In all cases, the maximum value of the function decreases as the number of iterations increases, eventually approaching zero.

Figure 1 consists of 10 subplots, labeled (a) through (j), each showing a different statistical parameter plotted against the number of sampling points (n), which ranges from 1 to 10. The y-axis for all plots is labeled 'Parameter' and ranges from 0.0 to 1.0. The parameters shown are: (a) Mean, (b) Standard deviation, (c) Coefficient of variation, (d) Skewness, (e) Kurtosis, (f) Entropy, (g) Shannon's entropy, (h) Gini's index, (i) Simpson's index, and (j) Pielou's index. In all cases, the parameter value increases as the number of sampling points increases, with the rate of increase generally slowing down as n approaches 10.

Figure 1 consists of 10 subplots, labeled (a) through (j), each showing the maximum value of the function versus the number of iterations (from 0 to 100). The y-axis for all plots ranges from 0.0 to 1.0. The plots show the effect of varying different parameters on the maximum value of the function. The curves generally show a decreasing trend as the number of iterations increases, indicating convergence.

- (a) α : The maximum value starts at approximately 0.8 and decreases to near 0.0 by iteration 100.
- (b) β : The maximum value starts at approximately 0.8 and decreases to near 0.0 by iteration 100.
- (c) γ : The maximum value starts at approximately 0.8 and decreases to near 0.0 by iteration 100.
- (d) δ : The maximum value starts at approximately 0.8 and decreases to near 0.0 by iteration 100.
- (e) ϵ : The maximum value starts at approximately 0.8 and decreases to near 0.0 by iteration 100.
- (f) ζ : The maximum value starts at approximately 0.8 and decreases to near 0.0 by iteration 100.
- (g) η : The maximum value starts at approximately 0.8 and decreases to near 0.0 by iteration 100.
- (h) θ : The maximum value starts at approximately 0.8 and decreases to near 0.0 by iteration 100.
- (i) ϕ : The maximum value starts at approximately 0.8 and decreases to near 0.0 by iteration 100.
- (j) ψ : The maximum value starts at approximately 0.8 and decreases to near 0.0 by iteration 100.

Figure 1 consists of 10 subplots, labeled (a) through (j), each showing a different statistical parameter plotted against the number of sampling points (n), which ranges from 1 to 10. The y-axis for all plots is labeled 'Parameter' and ranges from 0.0 to 1.0. The parameters shown are: (a) Mean, (b) Standard deviation, (c) Coefficient of variation, (d) Skewness, (e) Kurtosis, (f) Entropy, (g) Shannon's entropy, (h) Gini's index, (i) Simpson's index, and (j) Pielou's index. In all cases, the parameter value increases as the number of sampling points increases, with the rate of increase generally slowing down as n approaches 10.

Figure 1 consists of 10 subplots, labeled (a) through (j), each showing the maximum value of the function versus the number of iterations (from 0 to 100). The y-axis for all plots ranges from 0.00 to 1.00. The plots show the effect of varying different parameters on the maximum value of the function. The parameters are: (a) α , (b) β , (c) γ , (d) δ , (e) ϵ , (f) ζ , (g) η , (h) θ , (i) ϕ , and (j) ψ . In all cases, the maximum value of the function decreases as the number of iterations increases, eventually approaching zero.

Figure 1 consists of 10 subplots, labeled (a) through (j), each showing the maximum value of the function versus the number of iterations (from 0 to 100). The y-axis for all plots ranges from 0.00 to 1.00. The plots show the effect of varying different parameters on the maximum value of the function. The parameters are: (a) α , (b) β , (c) γ , (d) δ , (e) ϵ , (f) ζ , (g) η , (h) θ , (i) ϕ , and (j) ψ . In all cases, the maximum value of the function decreases as the number of iterations increases, eventually approaching zero.

to a specific tag associated with the web page, ignoring a previously specified global conversion, inserting text into the web page from a specified file, removing a specific attribute from all tags associated with the web page, removing a specific attribute from a specific tag associated with the web page, removing a comments tag from the web page, removing a portion of the content from the web page, removing a specific tag from the web page, removing a specific tag and all the information that appears within the tag from the web page, replacing a first tag associated with the web page with a second tag associated with the web page, setting a specific value of a specific attribute of a specific tag, stopping processing of subsequent reformatting commands, substituting a first sequence of text for a second sequence of text, and removing table formatting.

73. The computer readable medium according to claim 58 further comprising instructions for providing the secure connection between a gateway operatively communicable with the mobile device and the proxy server.

74. A computer readable medium storing instructions executable by a computer, the instructions instructing the computer to execute extracting and reformatting web page contents for subsequent transmission to a mobile device, said instructions comprising:

- 1) providing a decorated uniform resource locator (URL) to connect a mobile device to an origin web server via a proxy server;
- 2) generating a user request from the mobile device to the proxy server for a web page having a first format, wherein the web page resides on the origin web server;
- 3) forwarding the user request from the proxy server to the origin web server;
- 4) receiving at the proxy server the web page contents from the origin web

- 13 server;
- 14 5) extracting at the proxy server desired content from the web page;
- 15 6) reformatting the desired content in accordance with at least one
- 16 predefined transform; and
- 17 7) transmitting to the mobile device the desired content.

1 75. The computer readable medium according to claim 74 further

2 comprising instructions for providing a secure connection between the mobile

3 device and the proxy server.

1 76. The computer readable medium according to claim 75 wherein the

2 HyperText Transport Protocol Secure (HTTPS) is utilized to provide the

3 secure connection.

1 77. The computer readable medium according to claim 75 further

2 comprising instructions for providing the secure connection between a

3 gateway operatively communicable with the mobile device and the proxy

4 server.

1 78. The computer readable medium according to claim 75 wherein the

2 secure connection is a secure socket layer connection.

1 79. The computer readable medium according to claim 76 further

2 comprising instructions for providing a secure connection between the proxy

3 server and the origin web server.

1 80. The computer readable medium according to claim 79 wherein the

2 secure connection is a secure socket layer connection.

1 81. The computer readable medium according to claim 74 wherein the

2 reformatting instructions comprise at least one of adding meta tag information
3 to a header of the web page, adding a specific attribute and an attribute value
4 to a specific tag associated with the web page, ignoring a previously specified
5 global conversion, inserting text into the web page from a specified file,
6 removing a specific attribute from all tags associated with the web page,
7 removing a specific attribute from a specific tag associated with the web page,
8 removing a comments tag from the web page, removing a portion of the
9 content from the web page, removing a specific tag from the web page,
10 removing a specific tag and all the information that appears within the tag
11 from the web page, replacing a first tag associated with the web page with a
12 second tag associated with the web page, setting a specific value of a specific
13 attribute of a specific tag, stopping processing of subsequent reformatting
14 commands, substituting a first sequence of text for a second sequence of text,
15 and removing table formatting.

1 82. A computer readable medium for extracting and reformatting web
2 page content into a format readable on a mobile device, the instructions
3 instructing the computer to execute extracting and reformatting web page
4 contents for subsequent transmission to a mobile device, said instructions
5 comprising:

- 6 1) generating a user request from the mobile device to a proxy server for a
7 web page having a first format, wherein the web page resides on an
8 origin web server;
- 9 2) forwarding the user request from the proxy server to the origin web
10 server;
- 11 3) receiving at the proxy server the web page contents from the origin web
12 server;
- 13 4) extracting at the proxy server desired content from the web page;
- 14 5) reformatting the desired content in accordance with at least one
15 predefined transform associated with the mobile device, the predefined

16 transforms comprising at least one of adding meta tag information to a
17 header of the web page, adding a specific attribute and an attribute
18 value to a specific tag associated with the web page, ignoring a
19 previously specified global conversion, inserting text into the web page
20 from a specified file, removing a specific attribute from all tags
21 associated with the web page, removing a specific attribute from a
22 specific tag associated with the web page, removing a comments tag
23 from the web page, removing a portion of the content from the web
24 page, removing a specific tag from the web page, removing a specific
25 tag and all the information that appears within the tag from the web
26 page, replacing a first tag associated with the web page with a second
27 tag associated with the web page, setting a specific value of a specific
28 attribute of a specific tag, stopping processing of subsequent
29 reformatting commands, substituting a first sequence of text for a
30 second sequence of text, and removing table formatting; and
31 6) transmitting to the mobile device the desired content using the secure
32 connection.

1 83. The computer readable medium according to claim 82 further
2 comprising instructions for providing a secure connection between the mobile
3 device and the proxy server.

1 84. The computer readable medium according to claim 82 wherein the
2 extracting instructions comprise:
3 identifying portions of source code corresponding to the desired content of
4 the web page, wherein the source code is comprised of objects; and
5 creating at least one expression using at least one predefined extraction
6 rule, wherein the expression extracts an object referenced in the at least
7 one expression.

0970770-110900

1 85. The computer readable medium according to claim 84, further
2 comprising instructions for storing the reformatted web page in a cache prior
3 to transmitting.

1 86. The computer readable medium according to claim 84, further
2 comprising instructions for storing the web page having the first format in a
3 cache prior to extracting.

1 87. The computer readable medium according to claim 82 wherein the
2 reformatting instructions are applied in accordance with predetermined
3 instructions for at least two mobile devices having a predefined common
4 characteristic.

1 88. The computer readable medium according to claim 87 wherein the
2 predefined characteristic is at least one of a type of operating system and a
3 type of browser.

1 89. The computer readable medium according to claim 84 wherein the
2 reformatting instructions are applied in accordance with predetermined
3 instructions to a particular type of mobile device.

1 90. The computer readable medium according to claim 89 wherein the
2 particular type of mobile device is defined by the manufacturer and model.

1 91. The computer readable medium according to claim 82 wherein the
2 reformatting instructions are applied in accordance with predetermined
3 instructions for a particular web page.

1 92. The computer readable medium according to claim 82 wherein the
2 reformatting instructions are applied in accordance with predetermined

3 instructions to all web pages.

1 93. A method for extracting and reformatting visual content into a format
2 readable on a mobile device, comprising the steps of:

- 3 1) providing a secure connection between the mobile device and a proxy
4 server;
5 2) generating a user request from the mobile device to the proxy server for
6 the content, wherein the content exists in a first format and resides on a
7 content server;
8 3) forwarding the user request from the proxy server to the origin content
9 server;
10 4) receiving at the proxy server the contents from the origin content server;
11 5) extracting at the proxy server a desired portion of the content;
12 6) reformatting the desired portion of the content in accordance with at
13 least one predefined transform; and
14 7) transmitting to the mobile device the desired portion of the content
15 using the secure connection.

1 94. The method according to claim 93 wherein the at least one predefined
2 transform of said reformatting step 6 comprises at least one of adding meta tag
3 information to a header of the content, adding a specific attribute and an
4 attribute value to a specific tag associated with the content, ignoring a
5 previously specified global conversion, inserting text into the content from a
6 specified file, removing a specific attribute from all tags associated with the
7 content, removing a specific attribute from a specific tag associated with the
8 content, removing a comments tag from the content, removing a portion of the
9 content from the content, removing a specific tag from the content, removing a
10 specific tag and all the information that appears within the tag from the
11 content, replacing a first tag associated with the content with a second tag
12 associated with the content, setting a specific value of a specific attribute of a

13 specific tag, stopping processing of subsequent reformatting commands,
14 substituting a first sequence of text for a second sequence of text, and
15 removing table formatting.

1 95. The method according to claim 93 wherein said step 5 of extracting
2 comprises the steps of:
3 a) identifying portions of source code corresponding to the desired content,
4 wherein the source code is comprised of objects; and
5 b) creating at least one expression using at least one predefined extraction
6 method, wherein the expression extracts an object referenced in the at least
7 one expression.

1 96. A method for extracting and reformatting visual content into a format
2 readable on a mobile device, comprising the steps of:
3 1) providing a decorated uniform resource locator (URL) to connect a
4 mobile device to a content server via a proxy server;
5 2) generating a user request from the mobile device to the proxy server for
6 the content, wherein the content exists in a first format and resides on a
7 content server;
8 3) forwarding the user request from the proxy server to the content server;
9 4) receiving at the proxy server the content from the content server;
10 5) extracting at the proxy server a portion of the content;
11 6) reformatting the desired portion of the content in accordance with at
12 least one predefined transform; and
13 7) transmitting to the mobile device the desired portion of the content.

1 97. The method according to claim 96 further comprising the step of
2 providing a secure connection between the proxy server and the content
3 server.

1 98. The method according to claim 96 wherein said step 5 of extracting
2 comprises the steps of:

- 3 a) identifying portions of source code corresponding to the desired content,
4 wherein the source code is comprised of objects; and
5 b) creating at least one expression using at least one predefined extraction
6 method, wherein the expression extracts an object referenced in the at least
7 one expression.

1 99. The method according to claim 96 wherein the at least one predefined
2 transform comprises at least one of adding meta tag information to a header of
3 the content, adding a specific attribute and an attribute value to a specific tag
4 associated with the content, ignoring a previously specified global conversion,
5 inserting text into the content from a specified file, removing a specific
6 attribute from all tags associated with the content, removing a specific
7 attribute from a specific tag associated with the content, removing a comments
8 tag from the content, removing a portion of the content from the content,
9 removing a specific tag from the content, removing a specific tag and all the
10 information that appears within the tag from the content, replacing a first tag
11 associated with the content with a second tag associated with the content,
12 setting a specific value of a specific attribute of a specific tag, stopping
13 processing of subsequent reformatting commands, substituting a first sequence
14 of text for a second sequence of text, and removing table formatting.

1 100. A method for extracting and reformatting visual content into a
2 format readable on a mobile device, comprising the steps of:

- 3 1) receiving at a proxy server a user request for the content from the
4 mobile device via a secure connection, wherein the content resides on
5 a content server;
6 2) forwarding the user request from the proxy server to the content server;
7 3) receiving at the proxy server the content from the origin web server;

- 8 4) extracting at the proxy server a portion of the desired content;
9 5) reformatting the desired portion of the content in accordance with at
10 least one predefined transform; and
11 6) transmitting to the mobile device the desired content using the secure
12 connection.

1 101. The method according to claim 100 wherein the at least one
2 predefined transform of said reformatting step 5 comprises at least one of
3 adding meta tag information to a header of the content, adding a specific
4 attribute and an attribute value to a specific tag associated with the content,
5 ignoring a previously specified global conversion, inserting text into the
6 content from a specified file, removing a specific attribute from all tags
7 associated with the content, removing a specific attribute from a specific tag
8 associated with the content, removing a comments tag from the content,
9 removing a portion of the content, removing a specific tag from the content,
10 removing a specific tag and all the information that appears within the tag
11 from the content, replacing a first tag associated with the content with a
12 second tag associated with the content, setting a specific value of a specific
13 attribute of a specific tag, stopping processing of subsequent reformatting
14 commands, substituting a first sequence of text for a second sequence of text,
15 and removing table formatting.

1 102. The method according to claim 100 wherein said step 4 of extracting
2 comprises the steps of:

- 3 a) identifying portions of source code corresponding to the desired content
4 of the web page, wherein the source code is comprised of objects; and
5 b) creating at least one expression using at least one predefined extraction
6 method, wherein the expression extracts an object referenced in the at least
7 one expression.

1 103. A method for extracting and reformatting web page content into a
2 format readable on a mobile device, comprising the steps of:

- 3 1) receiving at a proxy server a user request, from a mobile device via a
4 decorated uniform resource locator (URL), for the content, wherein the
5 content resides on an origin web server, and wherein the decorated
6 URL connects the mobile device to a content server via the proxy
7 server;
- 8 2) forwarding the user request from the proxy server to the content server;
- 9 4) receiving at the proxy server the content from the content server;
- 10 5) extracting at the proxy server a desired portion of the content;
- 11 6) reformatting the desired portion of the content in accordance with at
12 least one predefined transform; and
- 13 7) transmitting to the mobile device the desired content.

104. The method according to claim 103 wherein the at least one predefined transform comprises at least one of adding meta tag information to a header of the content, adding a specific attribute and an attribute value to a specific tag associated with the content, ignoring a previously specified global conversion, inserting text into the content from a specified file, removing a specific attribute from all tags associated with the content, removing a specific attribute from a specific tag associated with the content, removing a comments tag from the content, removing a portion of the content, removing a specific tag from the content, removing a specific tag and all the information that appears within the tag from the content, replacing a first tag associated with the content with a second tag associated with the content, setting a specific value of a specific attribute of a specific tag, stopping processing of subsequent reformatting commands, substituting a first sequence of text for a second sequence of text, and removing table formatting.

1 105. The method according to claim 103 wherein said step 5 of extracting

- 2 comprises the steps of:
- 3 a) identifying portions of source code corresponding to the desired content,
- 4 wherein the source code is comprised of objects; and
- 5 b) creating at least one expression using at least one predefined extraction
- 6 method, wherein the expression extracts an object referenced in the at least
- 7 one expression.

09/07/2014 10:00

WEB PAGE CONTENT TRANSLATOR

ABSTRACT OF THE DISCLOSURE

5 A system, method, and computer readable medium for reformatting web content into a format readable on one or more mobile devices is provided. A user generates a user request for a web page from a mobile device to a proxy server. The proxy server forwards the user request to an origin web server, which returns the requested web page to the proxy server. A conversion engine within the proxy server extracts the
10 desired content from the web page, and reformats the content in accordance with one or more predefined transform methods associated with the one or more mobile devices before transmitting the transformed web page with the desired content to the one or more mobile devices. Secure or unsecure connection provided via a decorated uniform resource locator can be used to connect a mobile device, the proxy server,
15 and an origin web server.

0970770-109085

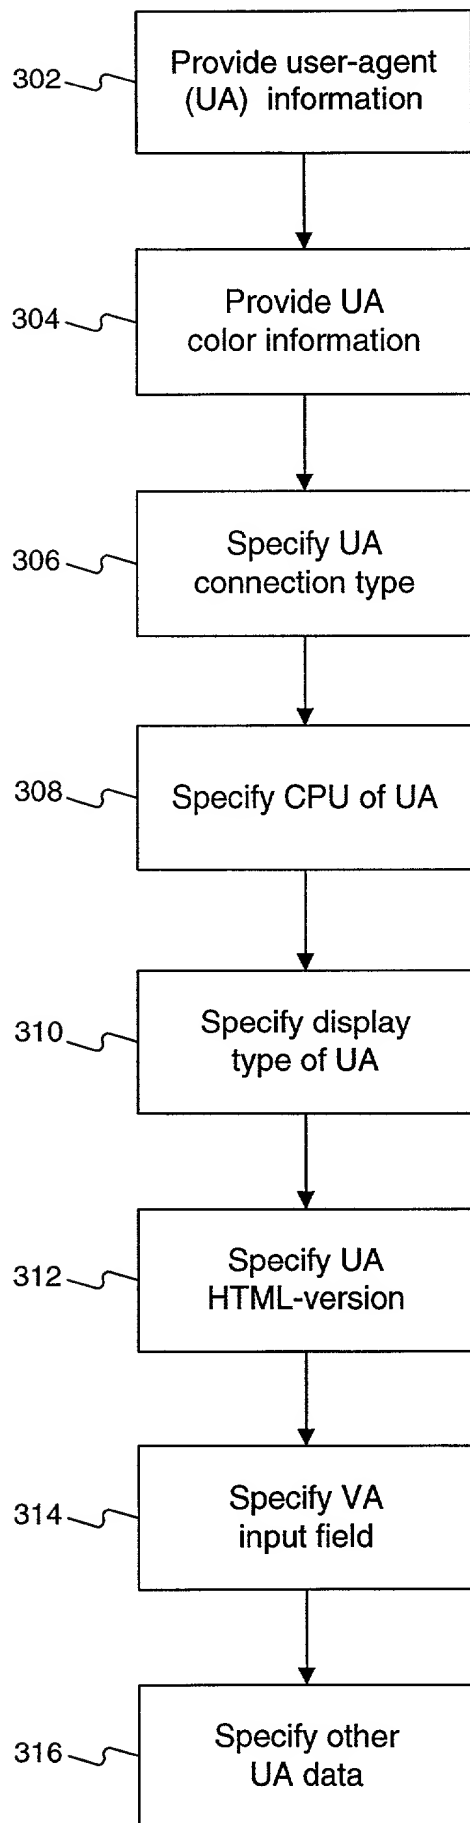



FIG. 3

450



AETHER

Create Device Profile

Your Device Label

Enter the specific values for each header the device sends

	Your User-Agent
402 2	N/A
404 2	
406 2	
408 2	
410 2	
412 2	
414 2	
416 2	

Figure 4 Create Device Profile Page

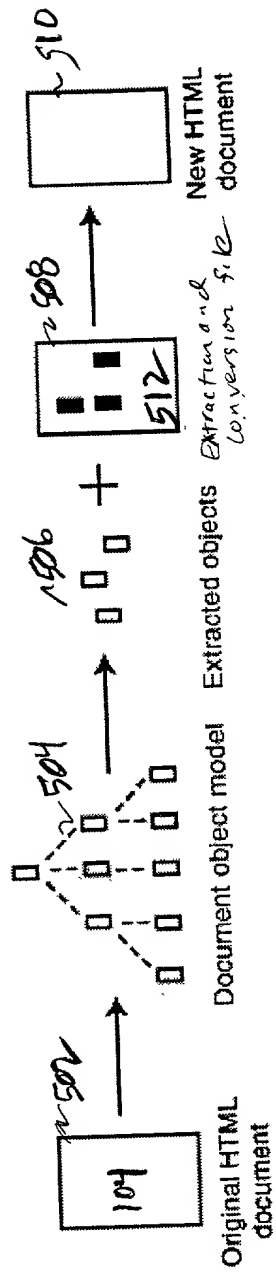


Figure 5 Site-Mining Workflow Diagram

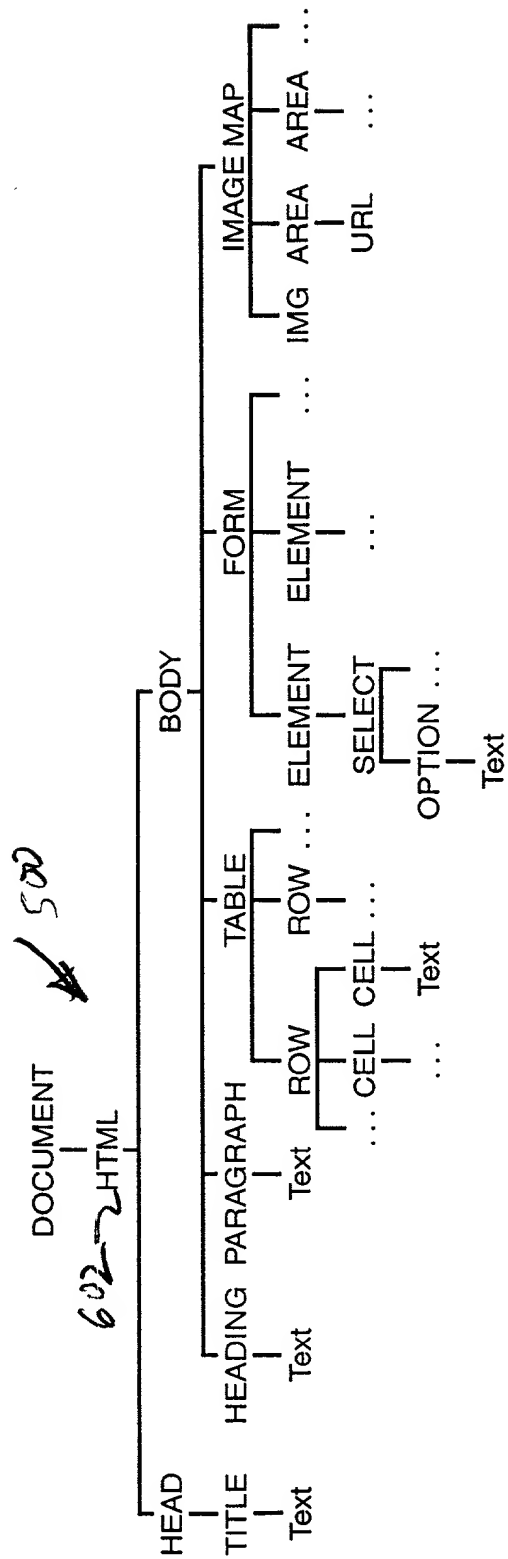


Figure 6 Document Object Model (DOM)

FIG. 7

30



Figure 8 Define Conversions for the Group Page

```
graph TD; 902[Perform conversions for mobile devices that support scripts and/or applets] --> 904[Perform conversions for gray-scale devices]; 904 --> 906[Perform conversions for color devices]; 906 --> 908[Perform conversions for background images];
```

900

902 Perform conversions for mobile devices that support scripts and/or applets

904 Perform conversions for gray-scale devices

906 Perform conversions for color devices

908 Perform conversions for background images

FIG 9

```
graph TD; 1002[Remove HTML Comments] --> 1004[Specify largest file size for converted images]; 1004 --> 1006[Remove tags that device browser does not support]; 1006 --> 1008[Scale attributes];
```

1002 Remove HTML Comments

1004 Specify largest file size for converted images

1006 Remove tags that device browser does not support

1008 Scale attributes

FIG 10

